


Robocall Mitigation Program Description -

Robocall mitigation program as applied to 47 CFR § 64.6305(d)(ii)-(iii)

Steps have been taken to fully insure that caller identification information on all originating calls are terminated through the proper carrier to ensure the STIR/SHAKEN authentication methods work correctly. No anonymous or spoofed calls can be originated through our network and only owned caller identification information can be sent with originated SIP calls.

Example Caller Identification selector:

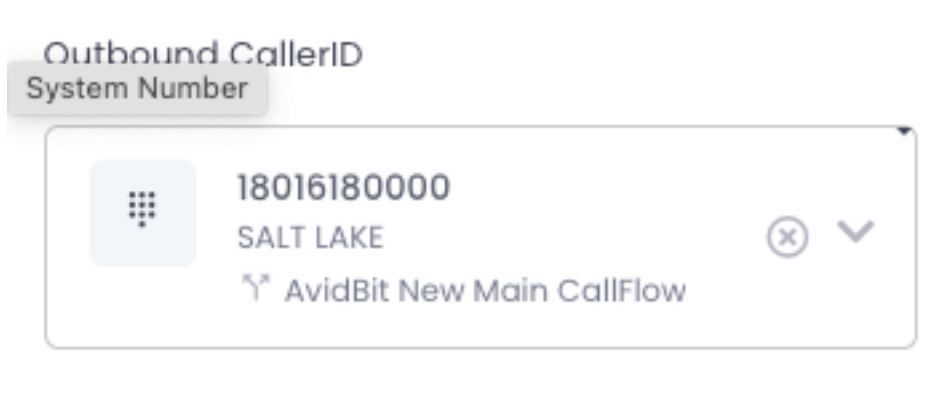

The image shows a software interface for selecting a caller ID. At the top, the text "Outbound CallerID" is displayed. Below it, a grey button labeled "System Number" is visible. A dropdown menu is open, showing a list of available caller IDs. The first entry is "18016180000" with a small grid icon to its left. Below the number, the text "SALT LAKE" is displayed. At the bottom of the entry, there is a small icon of a person and the text "AvidBit New Main CallFlow". To the right of the entry, there are two icons: a circle with an 'x' and a downward-pointing chevron.

Caller Identification information cannot be entered manually, but only selected from a list of available phone numbers to ensure correct STIR/SHAKEN information is added at the carrier (Bandwidth's) network.